
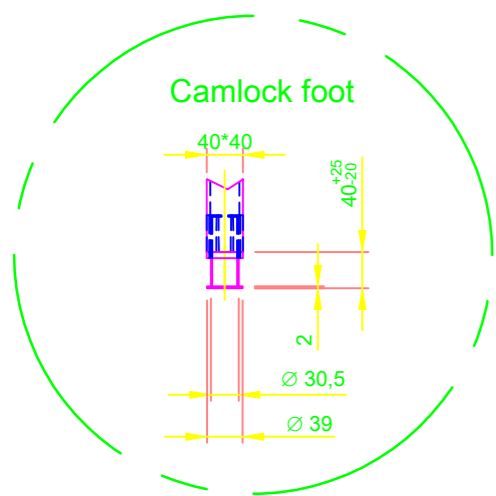
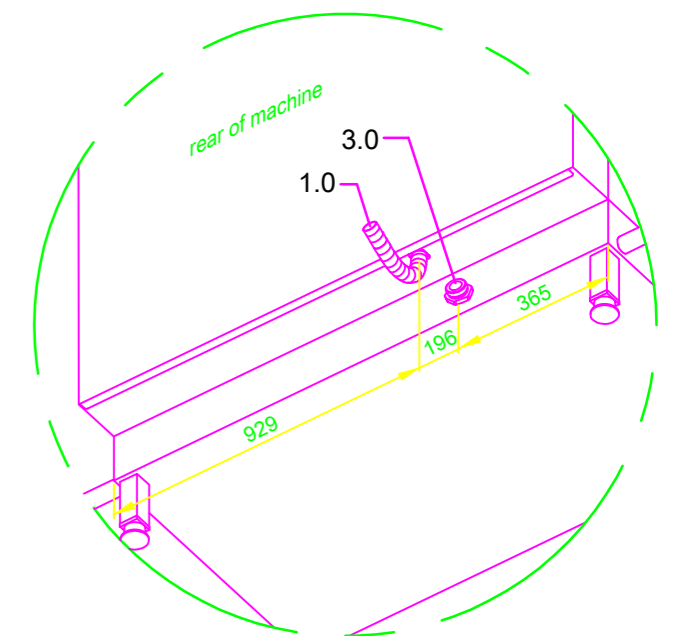
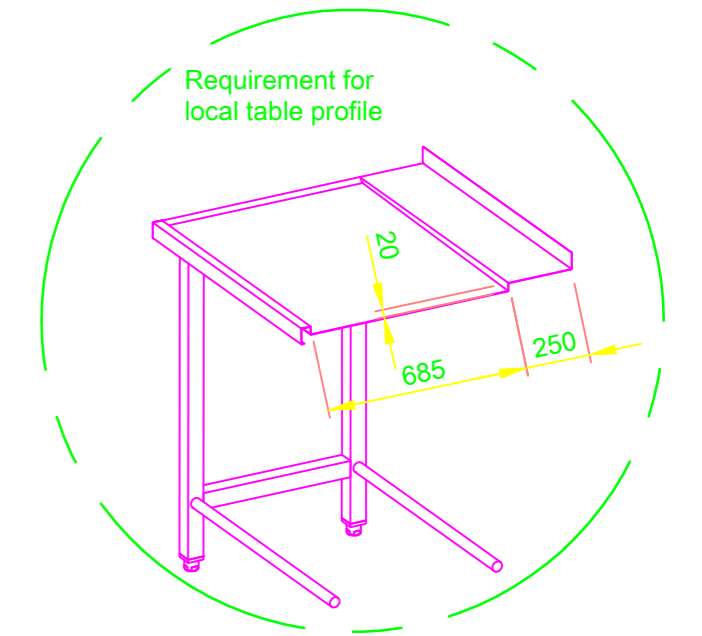
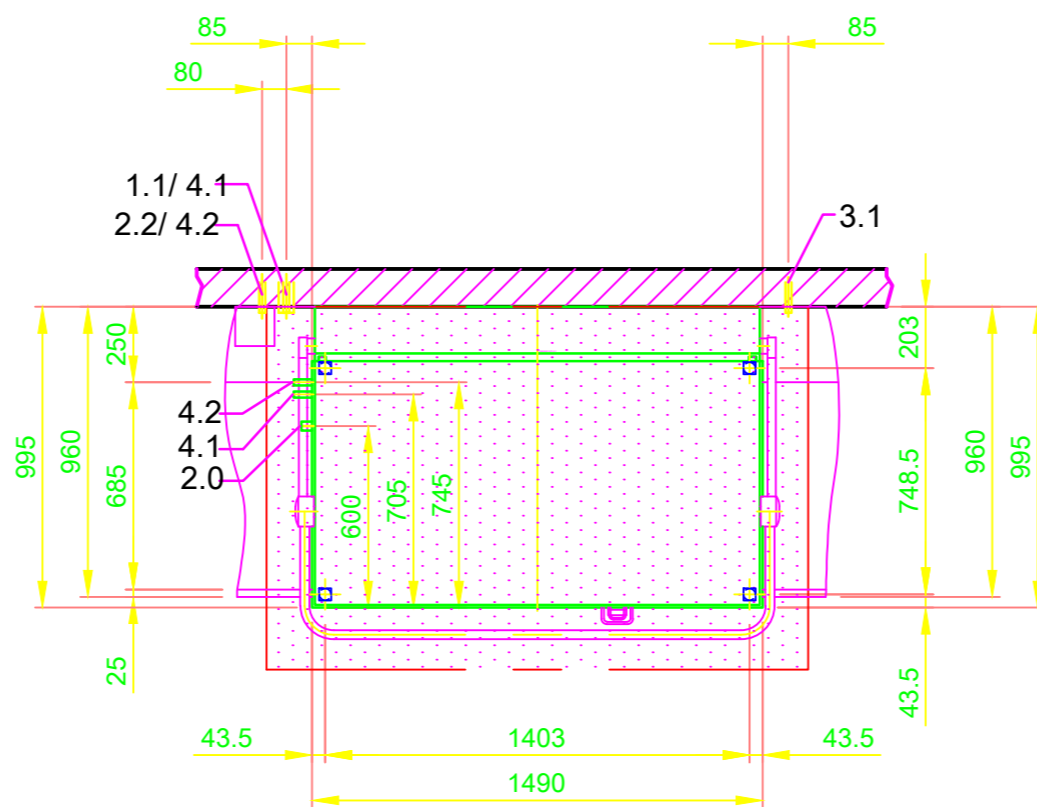
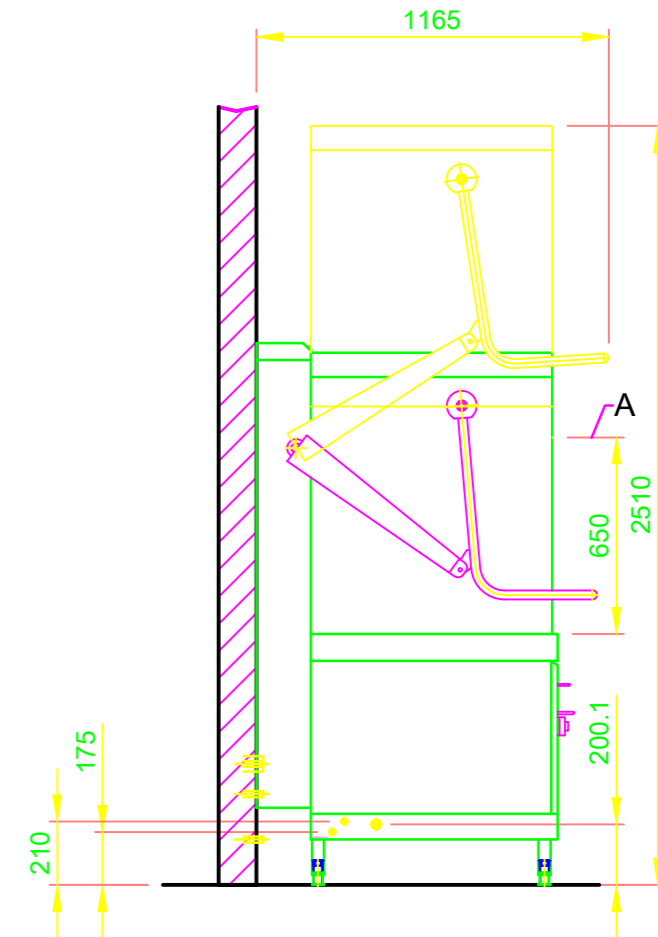


1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine
1.1	drain (max. 700 mm above finished floor level), DN 50
2.0	Machine connection: fresh water supply, G 3/4"
2.2	Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/l CaCO <sub>3</sub> (max. 3°dH) Flow rate: 5,0 l/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen ≤ 25 µm
3.0	Machine connection: electrical connection cable 4G 2,5mm <sup>2</sup>
3.1	electricity supply to the machine: 3PE 460V ~ 60Hz nominal current / - capacity: 8,7 A / 4,9 kW ⚡ Voltage equalising cable Electrical equipment suitable for supply voltage: 3 PE 440-480 V 60 Hz
4.1	saturated steam 2 bar overpressure consumption approx. 22,2 kg steam for 15 programme cycles/h, DN 20, R 3/4
4.2	condensate, DN 20, R 3/4
6.0	Heat load of warewash area The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 % Recommended suction area according to German EN 16282 or any local regulations have to be observed to determine ventilation of wash areas The total heat load includes 6.1
6.1	Heat load of the machine in normal washing operation: for 15 programme cycles/h total 6,7 kW, perceptible 4,5 kW, latent 2,2 kW For the total space load, all other space loads must be considered. The space ventilation must be designed in accordance with EN 16282.
all cables, pipes etc leaving machine 1,8 m	
the position of the connection piping can also be mirror-inverted!	
<b>Machine Equipment</b>	
(A) Entry height	
Preparation for local ECOLAB dosing system, including transformer	
A "Rinse not ready" warning light has been included	
Main switch, installed	
Water filter unit, supplied loose	
according to USPH guidelines	
Feeding table on site	
Discharge table on site	

Filter unit with connection hoses for supply water delivered lose for installation on site

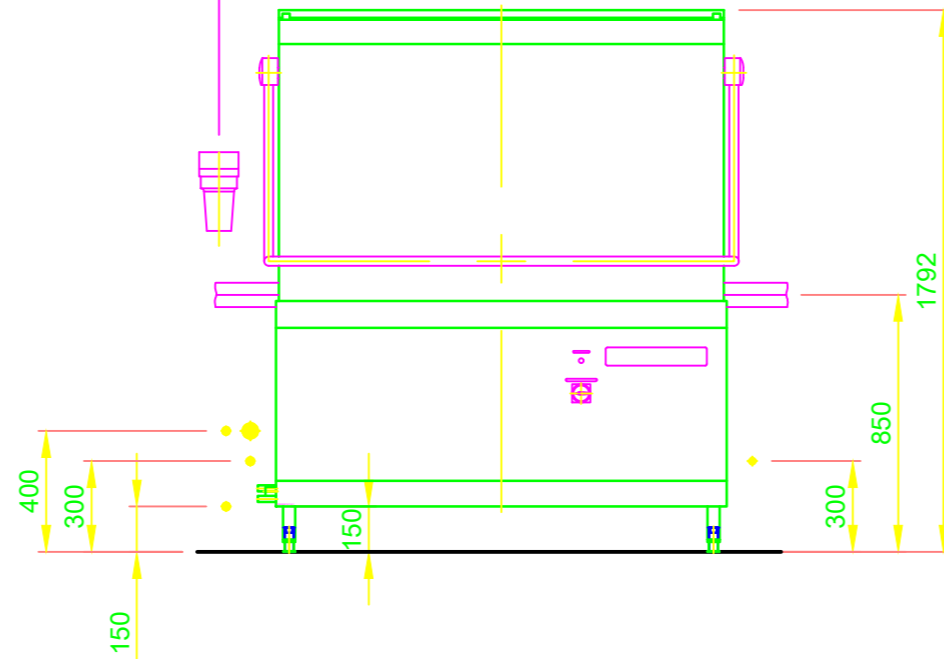

MASCHINENBAU GMBH & CO. KG. ENGLERSTR.3 77652 OFFENBURG GERMANY TEL. +49 0781/2030 TELEFAX +49 0781/2031303 E-MAIL: m-iplan@meiko-global.com		Reference DISHWASHER STANDARD DRAWING / XXX	Type DV270.2
This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to make changes resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process; it is also not subject to change management. Please note: This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnernet.		MARINE CRUISE Drawing-No. S00088210	Order-No.
Scale	1:25	drawn:	10.08.2020 m-iplan
checked:	10.08.2020	checked:	10.08.2020 m-iplan
Scale	XXX	EN	