



Ссор	YRIGHT by MEIKO									
1.0	machine connection: drain connection hose, DN 22									
	hose fitted as odour trap in interior of machine									
1.1	drain (max. 700 mm above finished floor level), DN 50									
2.0	Machine connection: fresh water supply, G 3/4"									
2.2	Soft cold water 10°C, DN 15, G 3/4 a									
	max. 0,54 mmol/l CaCO₃ (max. 3°dH)									
	Flow rate: 5 l/min									
	Minimum flow pressure: 60 kPa / 0.6 bar in front of solenoid valve									
	Maximum pressure: 500 kPa / 5.0 bar stopcock and fine screen ≤ 25 µm									
0.0	Machine connection: electrical connection cable 5G 6mm <sup>2</sup>									
3.0										
3.1	electricity supply to the machine: 3N PE 400V ~ 60Hz									
	nominal current / - capacity: 16.3 A / 10.0 kW Fuse protection: 20 A									
	Voltage equalising cable									
	The master switch must be provided on site									
	Note: Electrical equipment suitable for supply voltage:									
	3N PE 380-415 V 60 Hz / 1N PE 220-240 V 60 Hz									
6.0	Heat load of warewash area									
	The values apply for the following room conditions:									
Room temperature 22 °C, rel. humidity 55 %										
	Recommended suction area according to German EN 16282 or									
	any local regulations have to be observed to determine ventilation of wash areas									
	The total heat load includes 6.1									
6.1	Heat load of the machine in normal washing operation:									
	for 25 programme cycles/h									
	total 2.7 kW, perceptible 1.8 kW, latent 0.9 kW									
	For the total space load, all other space loads must be considered.									
The space ventilation must be designed in accordance with E										
	16282.									
	bles, pipes etc leaving machine 1,8 m									
the position of the connection piping can also be mirror-inverted!										
Height adjustable: machine feet +/- 30 mm, MEIKO table feet +/- 15 mm										
Mad	chine Equipment									
(A) E	ntry height									
(D) R	(D) Rinse agent pipe and suction lance									
(E) D	(E) Detergent dosing unit with suction lance									
Powe	wer Wash									
Autor	itomatic hood system									
	ng table on site									
Disch	harge table on site									

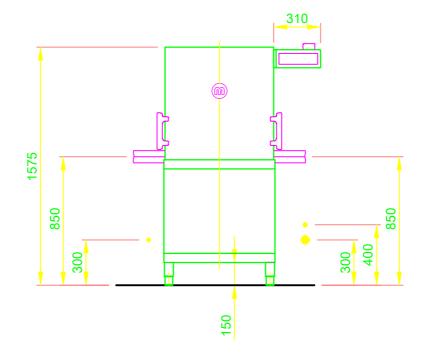


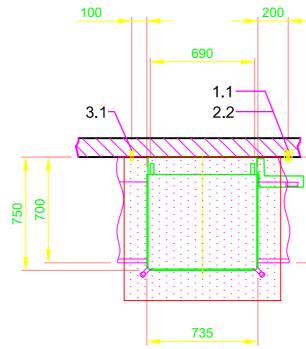

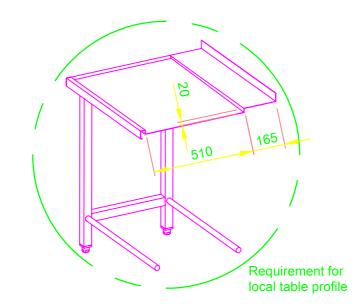

OM000024703.2.5 COPYRIGHT by MEIKO

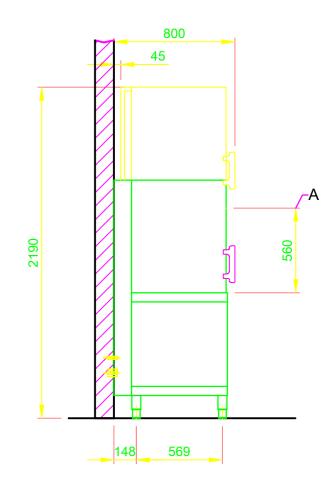

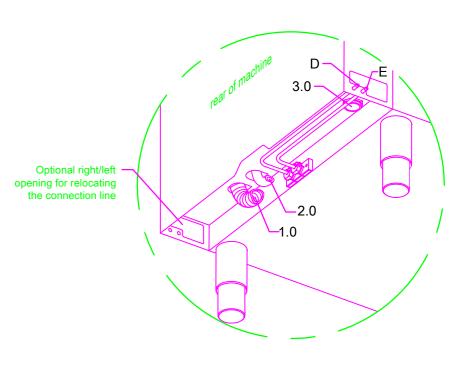

				Revision							
	MEIKO Clean Solutions (SEA) Sdn. Bhd. No 8, Lorong Teknologi C (OMNI), Taman Sains Selangor 1, Kota Damansara, 47810 Petaling Java, Selangor, Malaysia Tel: +60 3 6151 5461 Fax: +60 3 6151 5464 E-MAIL: support.asia@meiko-asia.com				Reference DISHWASHER STANDARD DRAWING / KOR			<sup>Type</sup> M-ICLEAN HL M2			
	This drawing may not be neither passed to third parties for their information or copied or used or competitive purposes without our consent. All rights reserved. We reserve the right to nake changes resulting from technical progress. This drawing was computer generated and s not subject to the checking and any release process; it is also not subject to change management. <u>Please note:</u> This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnernet.		0	TYPE: Drawing-No S0009		KERY	Order-No.				
				Scale 1:25	drawn: 14.08.20	20 m-iplan	checked: 14.08.2020	m-iplan			
Ĉ	COPYRIGHT by MEIKO			KOR	FN			COPYRIC	GHT by ME	IKO	