
1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine
1.1	drain (max. 700 mm above finished floor level), DN 50
2.0	Machine connection: fresh water supply, G 3/4"
2.2	Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/l CaCO₃ (max. 3°dH) Flow rate: 3 l/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen ≤ 25 μm
3.0	Machine connection: electrical connection cable 5G 2,5mm²
3.1	electricity supply to the machine: 3N PE 400V ~ 50Hz nominal current / - capacity: 15,7 A / 6,9 kW Fuse protection: 16 A Voltage equalising cable The master switch must be provided on site
6.0	Heat load of warewash area
6.1	for 20 programme cycles/h total 2,1 kW, perceptible 1,4 kW, latent 0,7 kW
all cables, pipes etc leaving machine 1,6 m	
the position of the connection piping can also be mirror-inverted!	

Machine Equipment

(A) Entry height

Final rinse dosing unit with suction lance (blue connector)

Detergent dosing unit and suction lance

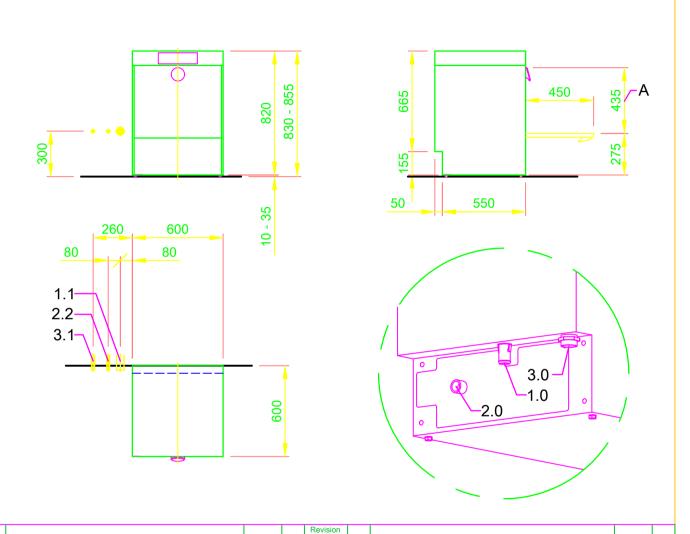



MEIKO AUSTRIA GMBH

Please note:
This document is only valid in conjunction with the conditions defined in Supplementary
Sheet "Important Information". These can be requested from the manufacturer or
downloaded from the Partnernet.

ΕN

OM000025092.2.5

©COPYRIGHT by MEIKO HUN