
1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine
1.1	drain (recommended height 70 mm, over 100 mm waste water pump required), DN 50
2.0	Machine connection: fresh water supply, G 3/4"
2.2	Soft cold water 10°C, DN 20, G 3/4 a max. 0,54 mmol/l CaCO₃ (max. 3°dH) Flow rate: min. 0,22 l/s at 250 kPa/ 2,5 bar flow pressure Minimum flow pressure: 250 kPa / 2,5 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen ≤ 25 μm
3.0	Machine connection: electrical connection cable 5G 2,5mm²
3.1	electricity supply to the machine: 3N PE 400V ~ 50Hz nominal current / - capacity: 12,8 A / 3,7 kW Fuse protection: 16 A Voltage equalising cable The master switch must be provided on site Electrical equipment suitable for supply voltage: 3N PE 380-415 V 50 Hz / 1N PE 220-240 V 50 Hz
6.0	Heat load of warewash area
6.1	for 15 programme cycles/h total 1,0 kW, perceptible 0,7 kW, latent 0,3 kW
all cables, pipes etc leaving machine 1,6 m	
the position of the connection piping can also be mirror-inverted!	
Machine Equipment	
(A) Entry height	
Rinse agent pipe and suction lance (blue connector)	



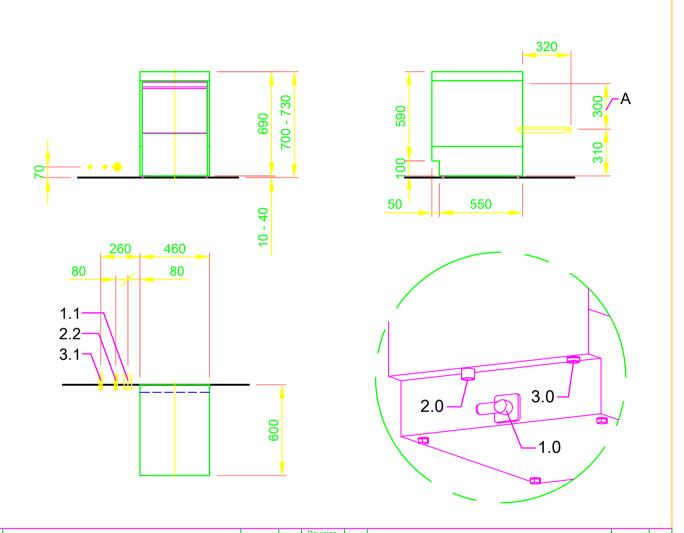

Detergent pipe and suction lance

ΕN